

H32C1H3

Modules

Swaging head: HPM.H32 Calibrator: HPM.C1 Power base: HPM.H3

Swaging Head

Max. press-force: 175 t (1750kN)

Press-range: 6,0-57,9mm

Max. opening: dies Ø +31,6mm

Swaging range: 12mm Max. die-length: 75mm

Working pressure: 310 bar / 4.500 PSI

Working Range

Textile reinforced hoses up to ID $1\frac{1}{2}$ " 1-2 wire hose up to ID $1\frac{1}{2}$ " 4 spiral hose up to ID $1\frac{1}{4}$ "

Calibrator

Micrometer with millimetre - scale.

Indicator: Sight/feel control


Power Base

Hand-pump, twin speed, mounted on baseplate with integral tank.

Dimensions (LxWxH): 430x400x670mm

Weight: 85 Kg Art.No.: 363.031

Suitable die type: HPD.32

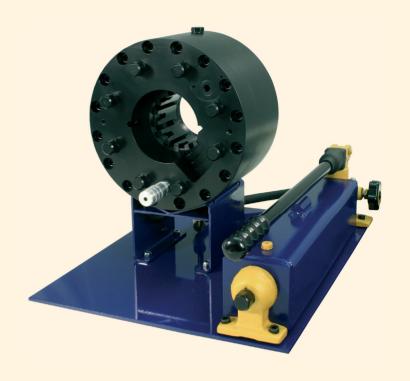

Description:

Mid-range service hose-press with working range up to ID 1½" (1½"-4spiral), for workshop - bench mounting and mobile use. Manual operated.

Possible upgrades:

Extension of working-range up to 2" with HPM.H50 possible. Extension for the use as workshop machine with Power units HPM.E1, E2, E3 possible (110, 220 or 400volts) or for mobile with HPM.E5, E6 (12volts DC).