

## H32C1H3

.....

### Modules

Swaging head: HPM.H32  
Calibrator: HPM.C1  
Power base: HPM.H3

### Swaging Head

Max. press-force: 175 t (1750kN)  
Press-range: 6,0 – 57,9mm  
Max. opening: dies  $\varnothing$  +31,6mm  
Swaging range: 12mm  
Max. die-length: 75mm  
Working pressure: 310 bar / 4.500 PSI

### Working Range

Textile reinforced hoses	up to ID 1½"
1-2 wire hose	up to ID 1½"
4 spiral hose	up to ID 1¼"

### Calibrator

Micrometer with millimetre - scale.  
Indicator: Sight/feel control

### Power Base


Hand-pump, twin speed, mounted on baseplate with integral tank.

Dimensions (LxWxH): 430x400x670mm

Weight: 85 Kg

Art.No.: 363.031

Suitable die type: HPD.32

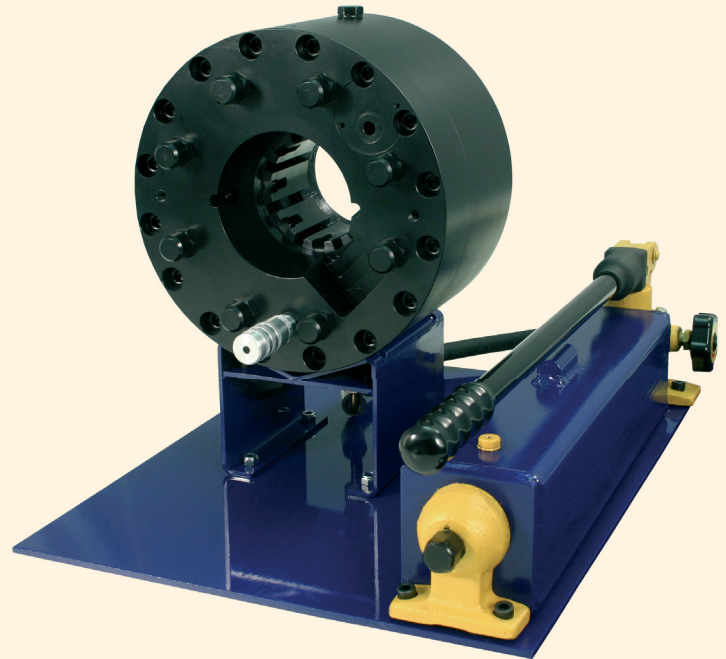

### Description:

Mid-range service hose-press with working range up to ID 1½" (1¼" - 4spiral), for workshop - bench mounting and mobile use. Manual operated.

### Possible upgrades:

Extension of working-range up to 2" with HPM.H50 possible. Extension for the use as workshop machine with Power units HPM.E1, E2, E3 possible (110, 220 or 400volts) or for mobile with HPM.E5, E6 (12volts DC).