

H32C5E2

.....

Modules

Swaging Head: HPM.H32
 Calibrator: HPM.C5
 Power base: HPM.E2-220V3

Swaging Head

Max. press-force: 175 t (1750kN)
 Press-range: 6,0 – 57,9mm
 Max. opening: dies Ø +31,6mm
 Swaging range: 12mm
 Max. die-length: 75mm
 Working pressure: 310 bar / 4.500 PSI

Working range

Textile reinforced hoses	up to ID 1½"
1-2 wire hose	up to ID 1½"
4 spiral hose	up to ID 1¼"

Calibrator

Metal micrometer with engraved millimetre scale / fully automated press stop

Power Base


Twin speed hydraulic power units in metal housing.
 Control options of machine: open / close pushbutton control / power indicator / emergency-stop

Max. cycle time (o-c) 4 sec.
 Max. cycle time (c-o) 10 sec.

Dimensions (LxWxH): 552x615x705mm

Weight: 165 Kg

Suitable die type: HPD.32

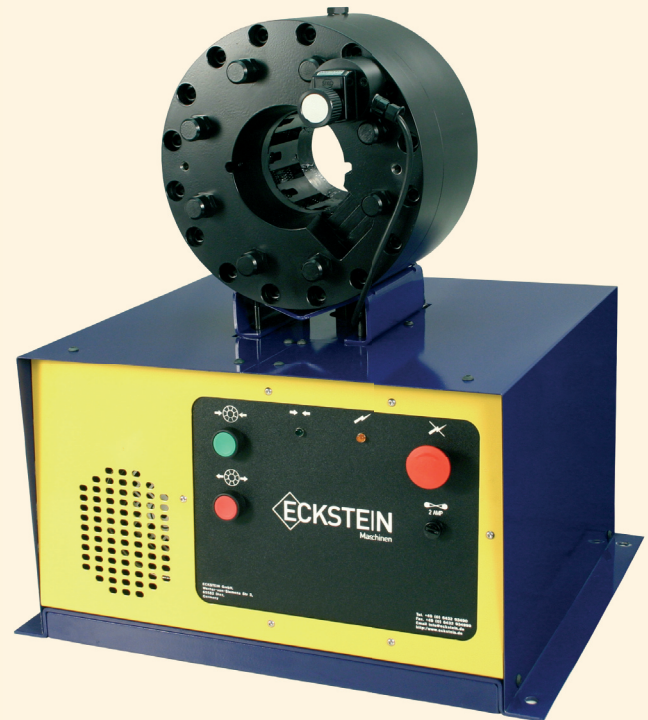

Description:

Mid-range workshop hose-press with working range up to ID 1½" (1¼" 4 spiral). Electrically operated which automatically stops at Calibrator size.

Possible upgrades:

Option of working range up to 2" with HPM.H50 possible.
 Option of operating options and foot pump with Power bases HPM.E3 (110, 220 or 400volts) possible.

Power options

110V	[Art.No.: 363.215]
220V 1 phase	[Art.No.: 363.235]
220V 3 phase	[Art.No.: 363.225]
400V	[Art.No.: 363.245]